

## Suckerrod Coupling Spinner





- » Quickly threads rod couplings onto sucker rods
- » Made of neoprene
- » One size fits all couplings

### Specifications

Part No.	Drive Size	Overall Dimensions	Weight
QS1S	1/2"	2-3/8" O.D. x 2-1/4"	6-1/2 ozs.

WARNING! Keep hands clear of rotating parts.

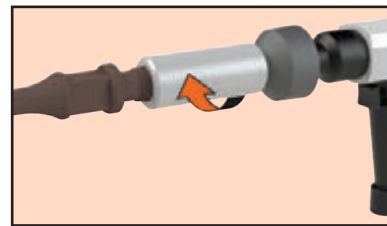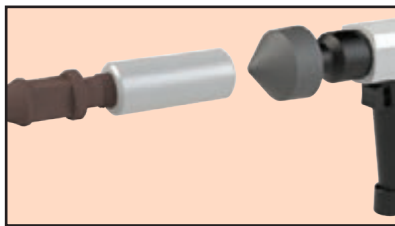

## Stabbing Tong



- » Quickly spins up couplings or small pipe
- » Easily applied and removed
- » Lightweight tool provides proper leverage

### Specifications

Part No.	O.D.	Gripping Width	Tong Length	Weight
SSA1	1-1/4" - 4"	2.13"	13"	9 lbs.
SSA2	2" - 4"	2.25"	16"	10 lbs.

WARNING! Use as a hand tool only. Do Not Strike, use a "cheater" or extend handle. SERIOUS INJURY may result if used improperly. Read Safe Practices & Procedures Manual prior to operation. Follow OSHA, NSC, etc. standards, safe practices, and procedures.

NOTE: Safe Practices & Procedures Manual can be found on pages 31-37 of this product guide.

## Shothole Casing Tong



- » Lightweight full opening tongs for easy and rapid application
- » Friction jaws ratchet easily and will not crush or mar workpiece

### Specifications

Part No.	O.D.	Gripping Width	Handle Length	Weight
SHA3	3.000"	2.00"	26"	8 lbs.

WARNING! Use as a hand tool only. Do Not Strike, use a "cheater" or extend handle. SERIOUS INJURY may result if used improperly.