
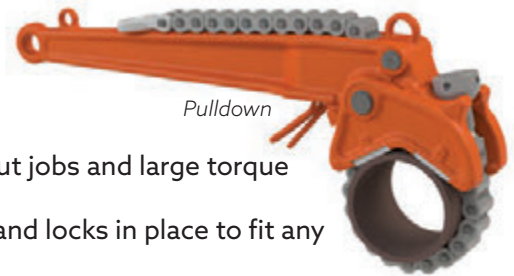


Visetongs

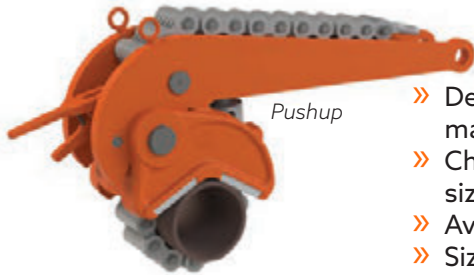

- » Designed for heavy load breakout jobs and large torque makeup requirements
- » Chain easily slides through jaw and locks in place to fit any size in the O.D. range
- » Available in pulldown and pushup designs
- » Sizes capable of delivering up to 200,000 ft.-lbs. torque

Specifications – Pushup

Part No.	O.D.*	Gripping Width	Handle Length**	Weight***
VTUA118-4D	4" – 24"	9.00"	54"	328 lbs.
VTUA118-4D-L36	4" – 24"	9.00"	36"	294 lbs.
VTUA120	6" – 24"	12.63"	42"	559 lbs.

Specifications – Pulldown

Part No.	O.D.*	Gripping Width	Handle Length**	Weight***
VTDA115H	2" – 8"	5.25"	24"	74 lbs.
VTDA116H-4D	4" – 14"	7.25"	36"	170 lbs.
VTDA118-4D	4" – 24"	9.00"	46"	313 lbs.
VTDA120	6" – 24"	12.63"	36"	575 lbs.

*Chain assemblies must be ordered separately. See Chain Selection Guide on product page of website.

**Call factory for torque arm lengths.

***Weights do not include chain.

>>> **Maximum Working Loads** <<<

Torques vary according to tong being used.

See Max. Working Loads on product page of website.



WARNING! Do Not Exceed Maximum Working Load! Overloading may result in **SERIOUS INJURY** or **DEATH!**
Always use a load cell or other calibrated indicating device to monitor the line pull on the tong to avoid overload. Read Safe Practices & Procedures Manual prior to operation. Do not operate without a manual.
Follow OSHA, NSC, etc. standards, safe practices, and procedures.



NOTE: Safe Practices & Procedures Manual can be found on pages 31-37 of this product guide.

Tongvise

Specifications

Part No.	O.D.*	Gripping Width	Weight***
TVA115H	2" – 8"	5.25"	41 lbs.
TVA116	4" – 14"	7.00"	107 lbs.
TVA116H	4" – 14"	7.25"	121 lbs.
TVA118	4" – 24"	9.00"	247 lbs.
TVA120	6" – 24"	12.63"	472 lbs.

*Chain assemblies must be ordered separately. See Chain Selection Guide on product page of website.

**Weights do not include chain.

>>> **Maximum Working Loads** <<<

Torques vary according to vise being used.

See Max. Working Loads on product page of website.



- » Suitable for heavy-duty breakout or makeup operations
- » Chain easily slides through jaw and locks in place to fit any size in the O.D. range
- » Self-tightening feature increases grip as torque increases
- » Sizes capable of delivering up to 200,000 ft.-lbs. torque



WARNING! Do Not Exceed Maximum Working Load! Overloading may result in **SERIOUS INJURY** or **DEATH!**
Always use a load cell or other calibrated indicating device to monitor the line pull on the tong to avoid overload. Read Safe Practices & Procedures Manual prior to operation. Do not operate without a manual.
Follow OSHA, NSC, etc. standards, safe practices, and procedures.



NOTE: Safe Practices & Procedures Manual can be found on pages 31-37 of this product guide.